



## TECHNICAL DATA


|                                                         |                                                                                                          |
|---------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| Useful electrical stroke (C.E.U.)                       | 100/130/150/175/200/225/250/300/<br>350/360/400/450/500/600/700/750/<br>850/900/1000/1250/1500/1750/2000 |
| Independent linearity<br>(within C.E.U.)                | ± 0,05%                                                                                                  |
| Resolution                                              | infinite                                                                                                 |
| Repeatability                                           | 0.01 mm                                                                                                  |
| Electrical connection                                   | PK M - DIN43650 4-pin connector<br>PK B - DIN43322 5-pin connector                                       |
| Protection                                              | IP40                                                                                                     |
| Displacement speed                                      | ≤ 10m/s                                                                                                  |
| Displacement force                                      | ≤ 1.2 N                                                                                                  |
| Vibrations                                              | 5...2000Hz, Amax =0,75 mm<br>amax. = 20 g                                                                |
| Shock                                                   | 50 g, 11ms.                                                                                              |
| Acceleration operative                                  | 200 m/s² max (20g)                                                                                       |
| Tolerance on resistance                                 | ± 20%                                                                                                    |
| Recommended cursor<br>current                           | < 0,1 µA                                                                                                 |
| Maximum cursor<br>current                               | 10mA                                                                                                     |
| Maximum applicable voltage                              | 60V                                                                                                      |
| Electrical isolation                                    | >100MΩ at 500V=, 1bar, 2s                                                                                |
| Dielectric strength                                     | < 100 µA at 500V~, 50Hz, 2s, 1bar                                                                        |
| Dissipation at 40°C<br>(0W at 120°C)                    | 3W                                                                                                       |
| Temperature Coefficient<br>of the resistance            | -200 .... +200 ppm/°C typic                                                                              |
| Actual Temperature Coefficient<br>of the output voltage | ≤ 5ppm/°C typic                                                                                          |
| Working Temperature                                     | -30...+100°C                                                                                             |
| Storage Temperature                                     | -50...+120°C                                                                                             |
| Case material                                           | Anodised aluminium Nylon 66 G 25                                                                         |
| Mounting method                                         | Brackets with variable longitudinal axis<br>with M6 screw ISO4017-DIN933                                 |

## ***Main features***

- *The transducer has been improved in order to guarantee greater reliability under all conditions*
- *Mechanical linkage using joint with take up of play, M5 thread*
- *Installation is made simpler by the absence of electrical signal variation in output, outside the Theoretical Electrical Stroke*
- *The new grooves provide an excellent alternative to the usual system of fastening with brackets*
- *Ideal for applications on plastic injection presses, vertical presses, and on many other processing machines*
- *Grade of protection IP40*

**DISAI**  
Automatic Systems  
T. 962 448 450 [www.disai.net](http://www.disai.net)

## MECHANICAL DIMENSIONS

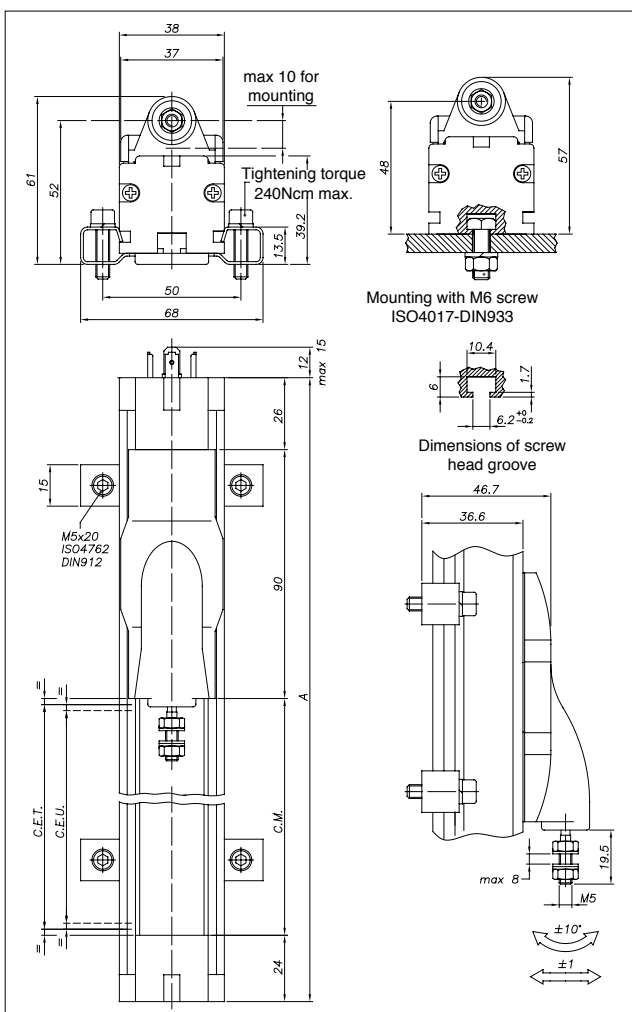


**Important:** all the data reported in the catalogue linearity, lifetime, temperature coefficient are valid for a sensor utilization as a ratiometric device with a max current across the cursor  $I_c \leq 0.1 \mu A$ .

## MECHANICAL / ELECTRICAL DATA

| MODEL                                         |    | 100 | 130 | 150 | 175 | 200 | 225 | 250 | 300 | 350 | 360 | 400 | 450 | 500 | 600 | 700 | 750 | 850  | 900  | 1000 | 1250 | 1500 | 1750 | 2000 |
|-----------------------------------------------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|
| Useful electrical stroke<br>(C.E.U.) + 3 / -0 | mm | 100 | 130 | 150 | 175 | 200 | 225 | 250 | 300 | 350 | 360 | 400 | 450 | 500 | 600 | 700 | 750 | 850  | 900  | 1000 | 1250 | 1500 | 1760 | 2000 |
| Theoretical electrical stroke<br>(C.E.T.) ± 1 | mm | 103 | 133 | 153 | 178 | 204 | 229 | 254 | 305 | 355 | 365 | 406 | 458 | 509 | 611 | 713 | 763 | 865  | 915  | 1017 | 1271 | 1521 | 1771 | 2021 |
| Resistance (C.E.T.)                           | kΩ | 5   |     |     |     |     |     |     |     |     | 10  |     |     |     |     |     |     |      |      |      | 20   |      |      |      |
| Mechanical stroke (C.M.)                      | mm | 113 | 143 | 163 | 188 | 214 | 239 | 264 | 315 | 365 | 375 | 416 | 468 | 519 | 621 | 723 | 773 | 875  | 925  | 1027 | 1281 | 1531 | 1781 | 2031 |
| Case length (A)                               | mm | 253 | 283 | 303 | 328 | 354 | 379 | 404 | 455 | 505 | 515 | 556 | 608 | 659 | 761 | 863 | 913 | 1015 | 1065 | 1167 | 1421 | 1671 | 1921 | 2171 |

## ELECTRICAL CONNECTIONS

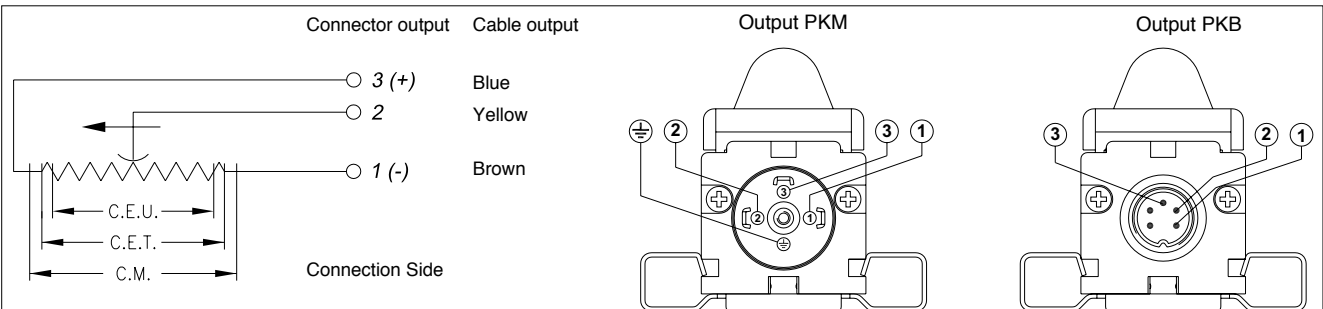

## INSTALLATION INSTRUCTIONS

- Respect the indicated electrical connections (DO NOT use the transducer as a variable resistance)
- When calibrating the transducer, be careful to set the stroke so that the output does not drop below 1% or rise beyond 99% of the supply voltage.

## ORDER CODE

The diagram illustrates the assembly of a PK code for a displacement transducer. The code is composed of several parts, each represented by a box or a table:

- Displacement transducer**: A box labeled "PK" with a line connecting to the "4-pole connector output" table.
- 4-pole connector output**: A table with two rows: "4-pole connector output DIN43650-ISO4400" (M) and "5-pole connector output DIN43322" (B).
- Model**: A box labeled "Model" with a line connecting to the "Model" field in the "Example" table.
- Certificate status**: A table with two rows: "No certificate attached" (0) and "Linearity curve to be attached" (L).
- Plastic head color**: A table with two rows: "Color of plastic heads (green)" (0) and "Color of plastic heads (black)" (N).
- Final digit**: A box with a line connecting to the "Final digit" field in the "Example" table.

The example PK code is: **PK - M - 0300 000X000X00**

The example PK code is explained: PK displacement transducer, 4-pole connector output DIN43650 - ISO 4400, useful electrical stroke (C.E.U.) 300mm., no certificate attached; green plastic components

## ACCESSORIES (standard)

|                                                                 |                 |
|-----------------------------------------------------------------|-----------------|
| Fixing kit for PK from 100 to 900: 2 brackets, screws, grower   | <b>PKIT 059</b> |
| Fixing kit for PK from 1000 to 2000: 3 brackets, screws, grower | <b>PKIT 061</b> |

### ACCESSORIES (optional)

|                                                                                     |               |
|-------------------------------------------------------------------------------------|---------------|
| PKM 4-pole 90° radial female connector DIN43650; IP65 PG9 clamp for ø 6-8 mm. cable | <b>CON006</b> |
| PKB 5-pole axial female connector DIN43322; IP40 clamp for ø 4-6 mm. cable          | <b>CON011</b> |
| PKB 5-pole axial female connector DIN43322; IP65 PG7 clamp for ø 4-6 mm. cable      | <b>CON012</b> |
| PKB 5-pole 90° radial female connector DIN43322; IP40 clamp for ø 4-6 mm cable      | <b>CON013</b> |

**GEFRAN spa** reserves the right to make any kind of design or functional modification at any moment without prior notice

**GEFRAN spa**  
via Sebina, 74  
25050 PROVAGLIO D'ISEO (BS) - ITALIA  
tel. 0309888.1 - fax. 0309839063  
Internet: <http://www.gefran.com>

# GEFRAN

DTS PK 0507 ENG