



# RECHARGEABLE SEALED LEAD ACID BATTERY

Revision 1.1



## WP1.2-12

### Specifications

**Nominal Voltage (V)** 12V

#### Nominal Capacity

20hour rate ( 0.06A )	to	10.50V )	1.2Ah
10hour rate ( 0.12A )	to	10.50V )	1.14Ah
5hour rate ( 0.204A )	to	10.20V )	1.02Ah
1C ( 1.2A )	to	9.60V )	0.54Ah
3C ( 3.6A )	to	9.60V )	0.42Ah

**Weight** Approx.0.608kg(1.34Lbs.)

**Internal Resistance (at 1KHz)** 78 mΩ

**Maximum Discharge Current for 5 seconds :** 118A

#### Operating Temperature Range

Charge	0°C (32°F)	to	40°C (104°F)
Discharge	-15°C (5°F)	to	50°C (122°F)
Storage	-15°C (5°F)	to	40°C (104°F)

#### Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 month	90%
6 month	80%

#### Charging Methods at 20°C (68°F)

##### Cycle use:

Charging Voltage 14.4 to 15.0V  
Maximum Charging Current : 0.36A

##### Standby use :

Float Charging Voltage 13.50 to 13.80V

#### Life expectancy :

##### Cycle Use :

100% depth of discharge 200 cycles  
80% depth of discharge 225 cycles  
50% depth of discharge 500 cycles

**Standby Use :** 3~5years

#### Case Material



ABS

(Option : 94-HB & 94V-0 flame retardant case)

#### Terminal

F1 or F2

### Dimensions

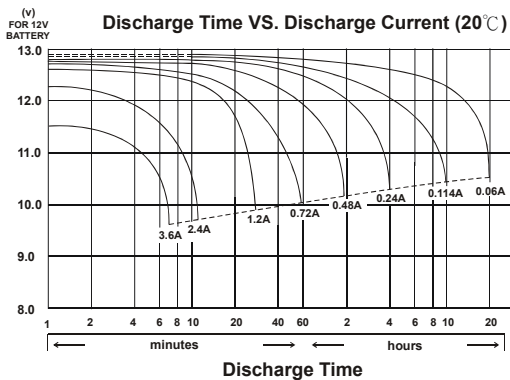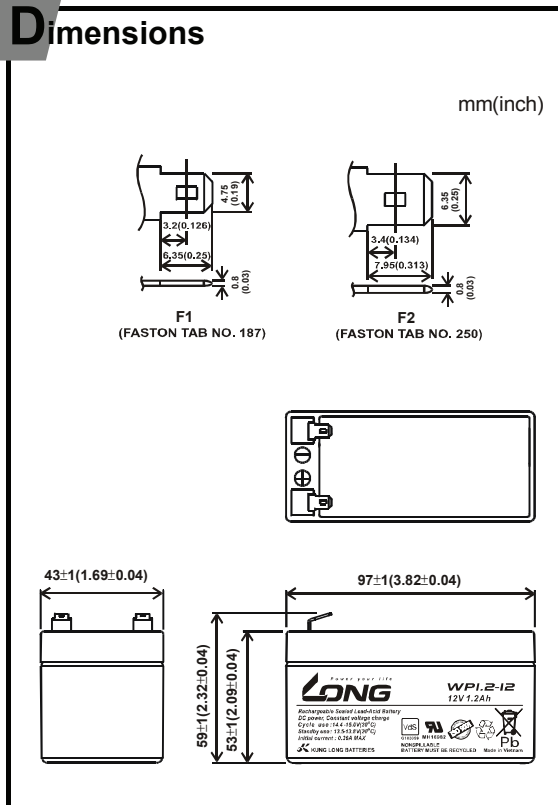

廣隆光電科技股份有限公司 Kung Long Batteries Industrial Co., Ltd.

南投市自立三路 6 號 NO. 6 TZU-LI 3 ROAD NANTOU CITY TAIWAN TEL: +886-49-2254777 ~8 FAX: +886-49-2255139

Contents in this data sheet are subject to change for improvement without prior notice to users. For clarifications and updated information, please contact us.

**DISAI**  
Automatic Systems

T-962 448 450 [www.disai.net](http://www.disai.net)