

## 7" HTML5 Web Panel



### Feature


- 7" 1024 x 600 Wide Viewing Angle LCD
- Tempered Glass Capacitive Touch Panel
- Built-in 4GB Flash Memory and RTC
- Fan-less Cooling System
- PCB coating process ensures high reliability to resist from corrosion in harsh environment.
- Built-in Power Isolator
- NEMA4 / IP66 Compliant Front Panel
- Powerful and versatile Chromium browser

<b>Display</b>	Display	7" Wide Viewing Angle (WVA)
	Resolution	1024 x 600
	Brightness (cd/m <sup>2</sup> )	450
	Contrast Ratio	800:1
	Backlight Type	LED
	Backlight Life Time	>30,000 hrs.
	Colors	16.7M
	LCD Viewing Angle (T/B/R/L)	85/85/85/85
	Pixel Pitch (mm)	0.1506 (H) x 0.1432 (V)
<b>Touch Panel</b>	Type	Tempered Glass, Capacitive Type
	Hardness Scale	7H
<b>Memory</b>	Flash	4 GB
	RAM	1 GB
<b>Processor</b>		Quad-core RISC
<b>I/O Port</b>	SD Card Slot	N/A
	USB Host	USB 2.0 x 1
	USB Client	N/A
	Ethernet	LAN 1: 10/100 Base-T x 1 LAN 2: 10/100 Base-T x 1
	COM Port	N/A
	RS-485 Dual Isolation	N/A
	CAN Bus	N/A
	HDMI	N/A
Audio Output	N/A	
<b>RTC</b>		Built-in
<b>Power</b>	Input Power	24±20%VDC
	Power Isolation	Built-in
	Power Consumption	820mA@24VDC
	Voltage Resistance	500VAC (1 min.)
	Isolation Resistance	Exceed 50MΩ at 500VDC
<b>Specification</b>	PCB Coating	Yes
	Enclosure	Plastic
	Dimensions WxHxD	200.3 x 146.3 x 36.9 mm
	Panel Cutout	192 x 138 mm
	Weight	Approx. 0.7 kg
	Mount	Panel mount
	Protection Structure	UL Type 4X (indoor use only) / NEMA4 / IP66 Compliant Front Panel
<b>Environment</b>	Storage Temperature	-20° ~ 60°C (-4° ~ 140°F)
	Operating Temperature	0° ~ 55°C (32° ~ 131°F)
	Relative Humidity	10% ~ 90% (non-condensing)
	Altitude	3,000 m
	Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)
	<b>Certificate</b>	CE
UL		cULus Listed
<b>Software</b>	Browser	Chromium 132 (Upgradable)*
	Weincloud	EasyAccess 2.0 (Optional)

\* The built-in browser does not support websites requiring Java Applets or the Java SDK.

\* For best compatibility, use websites developed with standard HTML5.

**Dimensions**

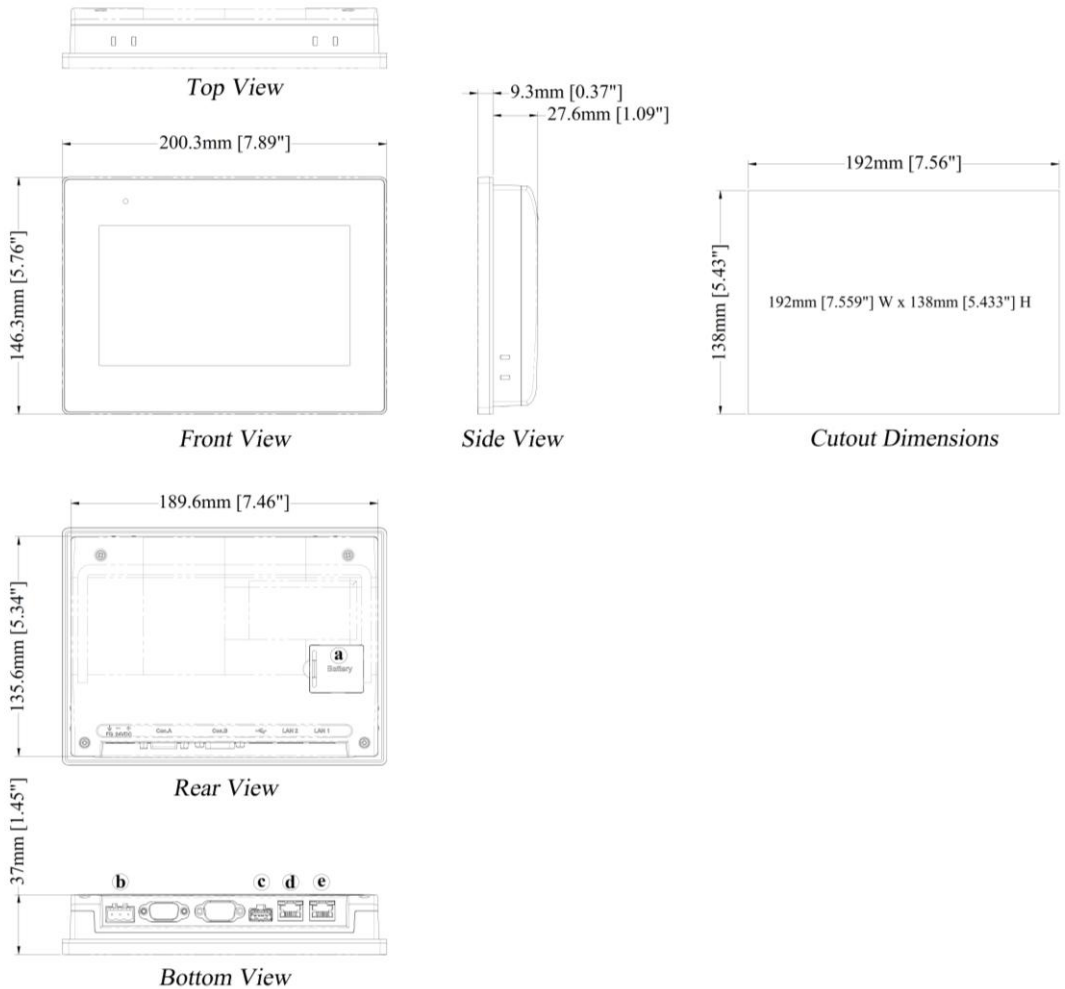

<b>a</b>	Battery
<b>b</b>	Power Connector
<b>c</b>	USB Host Port
<b>d</b>	LAN 2
<b>e</b>	LAN 1

**Ordering Information**

- cMT3072XP (W):**  
7" 1024 x 600 WVA LCD HMI, Built-in 4GB flash memory / 1GB DDR RAM on board
- RZUSK7010 (included in package)**  
USB Clamp & Tying Strap
- Optional:
  - RZACEA020:** EasyAccess 2.0 Activation Card

Contact: WEINTEK USA., INC. Phone: +1-425-488-1100 Web: [www.weintekusa.com](http://www.weintekusa.com)  
cMT3072XP (W)\_Datasheet\_ENG\_20250606



**DISAI**  
Automatic Systems  
T· 962 448 450 [www.disai.net](http://www.disai.net)