
PATLITIE®





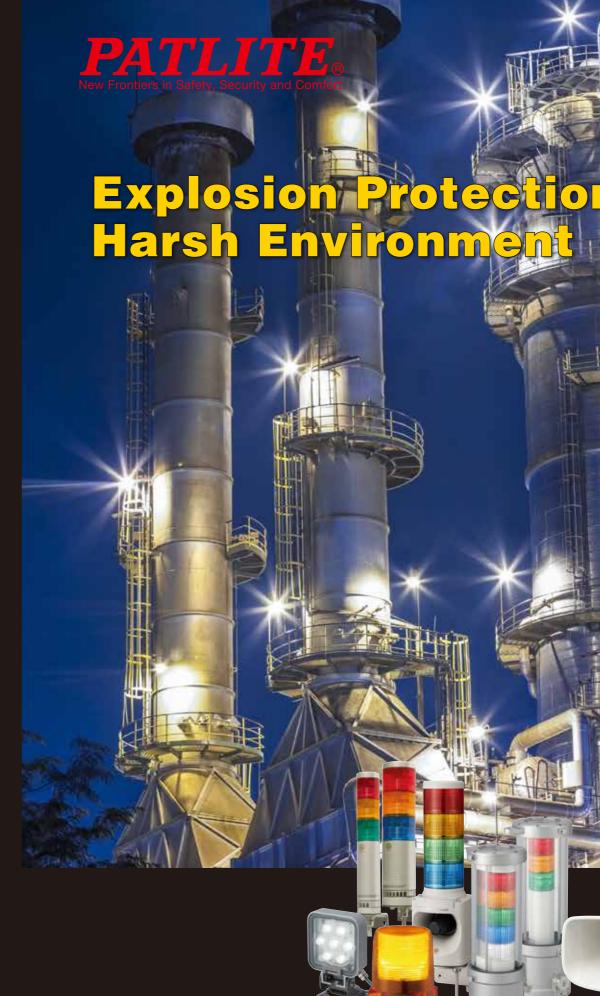

http://www.patlite.com e-mail:overseas@patlite.co.jp

## **PATLITE** Corporation

Inaba Building 4-11-14 Itachibori Nishi-ku Osaka 550-0012 International Division, Sales and Marketing Department TEL: +81-6-7688-5400 FAX: +81-6-7688-5401

PATLITE (U.S.A.) Corporation E-mail:sales@patlite.com

20130 S. Western Ave. Torrance, CA 90501, U.S.A. TEL: +1-310-328-3222 FAX: +1-310-328-2676

PATLITE (SINGAPORE) PTE LTD E-mail:sales@patlite.com.sg
No.2 Leng Kee Road, #05-01 Thye Hong Centre, Singapore 159086
TEL: +65-6226-1111 FAX: +65-6324-1411

PATLITE (CHINA) Corporation E-mail:sales@patlite.cn Room 512, Jufeng Business Building, No.697-3 Lingshi Road, Shanghai China 200072 TEL: +86-21-6630-8969 FAX: +86-21-6630-8938

**PATLITE Europe GmbH** E-mail:info@patlite.eu

Am Soeldnermoos 8, D-85399 Hallbergmoos, Germany TEL.+49 -811 9981 9770-0 FAX.+49-811 9981 9770-9

PATLITE KOREA CO., LTD. E-mail: sales@patlite.co.kr A-2603, Daesung D-POLIS, 543-1 Gasan-dong, Geumcheon-gu, Seoul, 153-719 TEL.+82-2-523-6636 FAX.+82-2-861-9919

PATLITE TAIWAN CO., LTD. E-mail: info@patlite.tw

7F. No. 91, Huayin St, Datong District Taipei, Taiwan R.O.C TEL.+886-2-2555-1611 FAX.+886-2-2555-1621

PT. PATLITE INDONESIA (FACTORY) LOT 321 Batamindo Industrial Park, Jalan Beringin Mukakuning, Batam 29433 Indonesia TEL: +62-770-61-1123 FAX: +62-770-61-2444

#### **PATLITE** Corporation

Headquarters: 4-4-25 Honmachi Chuo-ku Osaka 541-0053



To ensure correct use of these products, read the Instruction Manual prior to use. Failure to follow all safeguards can result in fire, electric shock, or other accidents. Specifications are subject to change without notice.









For the benefit of mankind and the earth, PATLITE is committed to developing environmentally friendly

Headquarters / Sanda Plant

PT. PATLITE INDONESIA

## "New Frontiers in Safety, Security and Comfort" is PATLITE's mission.

PATLITE offers state-of-the-art equipment for process and industrial automation for over 60 years. Our innovative and robust design, backed by a powerful commitment and years of knowledge, has made PATLITE the world's best known manufacturer of the visual and audible signaling products. We are also dedicated to the development of products that are safe in harsh and explosive environments to demonstrate our strong commitment to serving the industry with unique and innovative solutions.

In order to identify the diversified needs of our customers, and respond quickly and satisfactorily to those needs, we have implemented the POP (Point of Production) System together with a lean-manufacturing cell-based assembly system (combination, single, and flexible assembly).

These new systems allow us to handle any order rapidly from single items to customized item orders.

We've also reduced development time and production cost by having our own in-house machinery to design and manufacture metal moldings for making injection molded parts.

From designing to production, from raw material to the finished product, we also manage our quality control throughout the entire process. This is how we maintain our world class quality reputation for visual, audible signaling and networking information products.

#### From designing to production, quality control is managed throughout the process
















## World-wide Sales, Marketing and After-sales Support Network



## How an Explosion Occurs

An explosion can only occur if there is a combination of the following three factors.


- Source of ignition
- Oxygen
- Combustible substances

Combustible substances can exist in the form of gases, vapor, mist or dust. If one component is missing, no explosion will take place.

## How to minimize an explosion

The followings are protective measures to minimize the risk of an explosion.

- Limit concentration to a safe level
- Avoid combustible substances
- Increase ventilation
- Prevent the ignition
- Restrict explosive effects to a negligible level

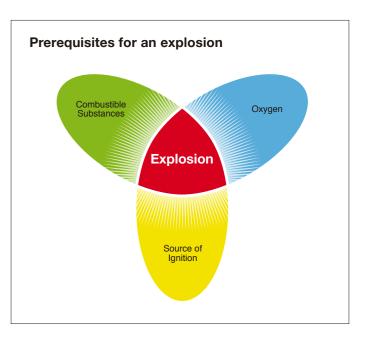

## ■ An explosive environment is categorized in three segments, Zone 0, Zone 1 and Zone 2, depending on the hazardous level of gases and vapors

#### Zone 0

An area where an explosive atmosphere consisting of a mixture of air containing flammable substances in the form of gas, liquid, or vapor continuously present or is frequently present for a longer period of time.

#### Zone 1

An area where an explosive atmosphere consisting of a mixture of air containing flammable substances in the form of gas, liquid, or vapor can occasionally occur during normal

#### Zone 2

An area where an explosive atmosphere consisting of a mixture of air containing flammable substances in the form of gas, liquid, or vapor is not likely to occur under normal conditions. However, if it occurs, it will only be for short period of time.



## ■ Various Applications for Explosion-Safe and Harsh Environments

	Branch	Explosion Hazard
	Power Generation Companies	Lump Coal Dust
	Woodworking Industry	<ul><li>Saw Dust</li><li>Fine Wood Chips</li></ul>
	Metal-work Operations	<ul><li>Explosive Metal Dust</li><li>Spark-ignitable Metal Dust</li></ul>
	Food/Beverage Industry	<ul><li>Ignitable Grain Dust</li><li>Explosive Sugar Dust</li></ul>
	Refinery Industry	<ul> <li>Hydrocarbons close to their flash-points</li> <li>Oil Processing Plants</li> </ul>
	Waste Disposal Companies	Waste-water Treatment Gases
	Landfills/Civil Engineering	<ul> <li>Flammable Landfill Gases</li> <li>Uncontrolled Gas Emissions</li> <li>Flammable Gas from poor ventilation sources</li> </ul>
556	Pharmaceutical Industry	<ul> <li>Alcohol Solvents</li> <li>Materials explosive when mixed</li> </ul>
	Gas Suppliers	<ul><li>Natural Gas Leakage</li><li>Natural Gas Emissions</li></ul>
	Paint-spraying Operations	<ul><li>Overspray in Spray-paint Bays</li><li>Solvent Vapor Emissions</li></ul>
	Recycling Operations	<ul> <li>Unemptied flammable gas/liquid containers</li> <li>Biodegradable Material Emitting Explosive Gases</li> </ul>
E A	Chemical Industry	<ul><li>Flammable Gases</li><li>Flammable Liquids</li><li>Flammable Solids</li></ul>
	Agriculture	<ul><li>Bio-gas Production Plants</li><li>Bio-gas Located on Farms</li></ul>

## Classification of Hazardous Areas


## ■ Gases/Vapors

The tank is filled with flammable liquid. The inside of the tank is defined as zone 0, because the explosive gas/oxygen mixture is continuously present.

Vapor may escape on occasion through the vent on the to

Vapor may escape on occasion through the vent on the top of the tank, therefore the area around the vent is categorized as Zone 1.

The vapor may also run down the outside of the tank, developing another explosive environment, so the area around the tank is categorized as Zone 2.

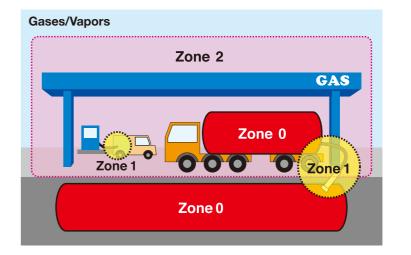

		Constant Exposure	Occasional Exposure	Rare and Temporary
ATEX	EN60079-10	Zone 0	Zone 1	Zone 2
IEC	IEC60079-10	Zone 0	Zone 1	Zone 2
US	NEC505	Zone 0 (Class I )	Zone 1 (Class I)	Zone 2 (Class I )
	NEC500	Division 1	Division 2 (Class I)	


## Dust

At a mill with a feed hopper and filter: A product, which causes dust particles mixed with air to cause a flammable mixture, is loaded into a hopper.

Inside the feed hopper and filter, it is categorized as Zone 20. While the product is being loaded, the mixture of dust and air

causes a potentially explosive compound in the area where the product is loaded into the hopper, so the area outside the hopper is categorized as Zone 21.

Around the hopper where a potential flammable atmosphere exists temporarily is categorized as Zone 22.

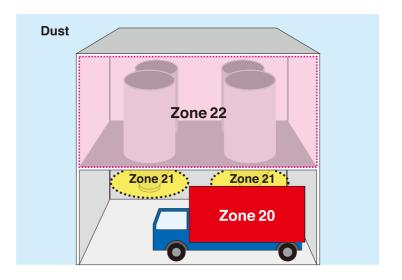

		Constant Exposure Occasional Exposure		Rare and Temporary
ATEX	EN61241-10	Zone 20	Zone 21	Zone 22
IEC	IEC61241-10	Zone 20	Zone 21	Zone 22
US	NEC505	Zone 20 (Class II)	Zone 21 (Class II)	Zone 22 (Class II)
	NEC500	Division	1 (Class II)	Division 2 (Class II)

3


## ■ Relationship of IEC, CENELEC, NEC 505 and NEC 500

IEC: International Electrotechnical Commission

CENELEC: European Committee for Electrotechnical Standardization


**NEC: National Electrical Code** 

IEC/CENELEC	Zone 0 Zone 1			Zo	Zone 2		
USA:NEC 505	Zone 0	Zone 1		Zone 2			
USA:NEC 500	Divisio	n 1		Division 2			
	Explosive Material	Class	Group	Explosive Material	Class	Group	
	Gas, Vapor or Liquid	I	A, B, C, D	Gas, Vapor or Liquid	I	A, B, C, D	
	Dust	II	E, F, G	Dust	II	E, F, G	
	Fibers	III		Fibers	III		

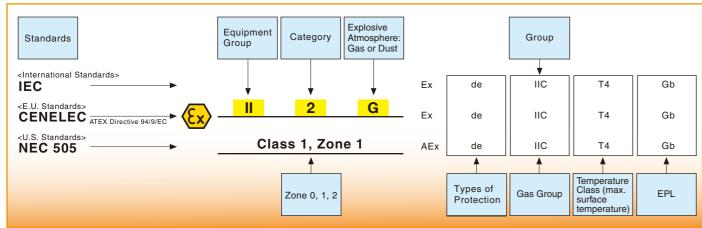


\*EPL:Equipment Protection Level

## ■ IP Protection Rate: Index of Ingress Protection

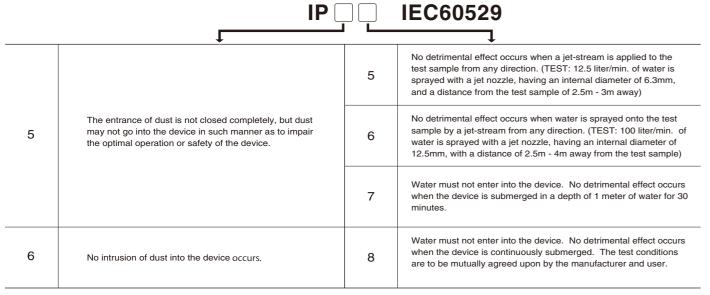

IP69K is the German DIN 40050 PART9 standard. It is defined as a protection regulation for high temperature and high-pressurized water. Water is heated up to 80 °C and sprayed at a water pressure in the range from 80 to 100 bars at 14 to 16 liters per minute at the test object. The test object is at a distance of 100 to 150 mm from the nozzle and sprayed in all directions at 0, 30, 60, and 90 degrees, then sprayed at a horizontal angle while it is being rotated, all done for a period of 30 seconds without being affected by water penetration.





## **Types of Protection**

Type of Protection Marking Diagram Definition

According to EN Standard Series EN 60079, explosion protected electrical equipment can have various types of protection according to its construction. The table below for Gas and Dust shows an overview of the standardized protections and describes its basic principal, as well as its practical applications.

**Applications** 

PATLITE Model

Select the suitable PATLITE explosion-safe and intrinsically-safe products according to the specific application and type of protection.

## Gas

Type of Frotection	iviaikiiig	Diagram	Delilillion	Applications	I ATLITE MOUCI
General requirements EN 60079-0 IEC 60079-0		<b>€x</b>			
Flameproof Enclosure "d" EN 60079-1 IEC 60079-1	Ex d	*	Parts which can cause ignition while in a potentially explosive environment are encased in an enclosure which can withstand the pressure to contain it when the explosive mixture ignites inside so it is not transmitted into the environment.	Switch Gear, Control Gear, Display Units, Control Systems, Motors, Transformers, Heating Equipment, Light Fittings	EDLM Series EDWM Series
Increased Safety "e" EN 60079-7 IEC 60079-7	Ex e	*	Preventative safety precautions are applied to prevent the possibility of excessive temperatures, the occurance of sparks or electrical arcing within the equipment enclosure or on exposed parts of the equipment that would not be a hazard in conditions where ignition sources are not present.	Terminal Boxes, Connection Boxes, Control Boxes (for installing Ex-components with different types of protection) Squirrel-cage Motors, Light Fittings	
Intrinsic Safety "i□" EN 60079-11 IEC 60079-11	Ex ia Ex ib Ex ic		Equipment used in a potentially explosive environment contains intrinsically safe electrical components only. The electric circuit is intrinsically safe when no sparks or internal heat produced under normal operating conditions and specific fault conditions is not capable of causing ignition in a given explosive atmosphere.	Measurement and Control Technology, Communication Technology, Sensors, Actuators. ia = use in Zone 0, 1, 2 ib = use in Zone 1, 2 [Ex ib] = associated equipment - installation in safe areas	n
Oil Immersion "o" EN 60079-6 IEC 60079-6	Ех о	7	Electrical equipment or parts are immersed in a protective fluid (such as oil), to prevent the ignition of a potentially explosive atmosphere which may be located over or outside the equipment.	Transformers, Starting Resistors	
Pressurized Enclosure "p□" EN 60079-2 IEC 60079-2	Ех р	<b>!</b>	Inside the enclosure, a positive internal pressure in relation to the surrounding atmosphere is maintained with the supply of a constant flow of protective gas (when necessary) to dilute any combustible mixtures.	Switch Gear, Control Cabinets, Analyzers, Large Motors. px = use in Zone 1, 2 py = use in Zone 1, 2 pz = use in Zone 2	
Powder Filling "q" EN 60079-5 IEC 60079-5	Ex q	*	The casing of the electrical equipment is packed with fine granular material to make it impossible for any electric arc created inside the casing under certain operating conditions to ignite the potentially explosive environment outside the casing. Ignition cannot be the result from flames or the raised temperature on the surface of the casing.	Sensors, Display Units, Electronic Ballasts, Transmitters	
Encapsulation "m□" EN 60079-18 IEC 60079-18	Ex m	4	Parts which can cause ignition in a potentially explosive environment by sparking or heating are enclosed in a compound to contain and isolate it from the ignition of an explosive environment.	Switch Gear with small breaking capacities, Control and Signalling Units, Display Units, Sensors. ma = use in Zone 0, 1, 2 mb = use in Zone 1, 2	
Type of Protection "n□" EN 60079-15 IEC 60079-15	Ex nA Ex nR Ex nL	<b> </b>	Electrical equipment cannot cause the ignition of a potentially explosive atmosphere (defined under abnormal operating conditions and during normal operation).	All Electrical Equipment for Zone 2 nA = non-sparking equipment nC = sparking equipment in which contacts are conveniently protected nL = energy-limited equipment nR = restricted breathing	AR-070 Series AR-078 Series LKEH-FV-EX Series LKEH-FE-EX Series EHS-EX/EHV-EX Series CLN-24-CD-PT-EX CLK-EX Series CLA-EX Series
Dust					
Type of Protection	Marking	Diagram	Definition	Applications	PATLITE Model
General requirements EN-IEC 60079-0 IEC 60079-0		<b>€x</b>			
Protection by Enclosures "t" EN-IEC 60079-31 IEC 60079-31	Ext	*	Dust is incapable of ingressing the enclosure at all or the quantity is at a safe degeree, which allows the ignitable equipment to be mounted inside. The surface temperature of the enclosure will not cause ignition to the surrounding explosive atmosphere.	Switch Gear, Control Gear, Connections, Terminal Boxes, Motors, Light Fittings. td A21 = According to Method A for Zone 21 td B21 = According to Method B for Zone 21	EDLM Series EDWM Series AR-070 Series AR-076 Series LKEH-FV-EX Series LKEH-FE-EX Series EHS-EX/EHV-EX Series CLN-24-CD-PT-EX CLK-EX Series CLA-EX Series
Pressurized Enclosure "pD" EN-IEC 61241-4 IEC 61241-4	Ex pD	<b>.</b> 4	Inside the enclosure, a positive internal pressure in relation to the surrounding atmosphere is maintained with the supply of a constant flow of protective gas (when necessary) to dilute any combustible mixtures.	Pumps	
Intrinsically Safe "i" EN-IEC 60079-11 IEC 60079-11	Ex ia Ex ib Ex ic		Equipment used in a potentially explosive environment contains intrinsically safe electrical components only. The electric circuit is intrinsically safe when no sparks or internal heat produced under normal operating conditions and specific fault conditions is not capable of causing ignition in a given explosive atmosphere.	Measurement and Control Technology, Communication Technology, Sensors, Actuators. iaD = use in Zone 20, 21, 22 ibD = use in Zone 21, 22 iEx ibD] = Associated Electrical Equipment - Installation in Safe Areas	
Encapsulation "m"  EN-IFC 60079-18			Parts which can cause ignition in a potentially explosive environment by sparking or heating are enclosed in a	Small capacity Switch Gear, Controlling and Signalling Units, Display Units,	

layer of dust or cloud.

compound to contain and isolate it from the ignition of a

maD = use in Zone 20, 21, 22 mbD = use in Zone 21, 22

6

EN-IEC 60079-18

IEC 60079-18

Ex ma

Ex mb


## **Maintenance Free LED Signal Lights**

The EDLM and EDWM series LED signal lights are visual warning and status indicating lights for use in hazardous locations that require compliance with the ATEX Directive 94/9/EC (CENELEC standard) or NEC Article 505 certification.

The EDLM and EDWM series offer wide range of voltages and versatile mounting options to meet various applications. The following chart explains the comparison between the ATEX Directive 94/9/EC (CENELEC standard) and NEC Article 505 certification. To find the most suitable models, refer to page 9 and 10.




## ■ Protection Method (ATEX/IEC)








## ■ Standard Markings

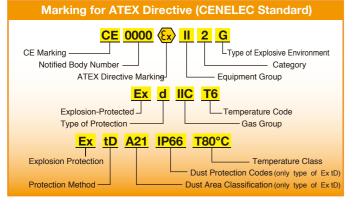

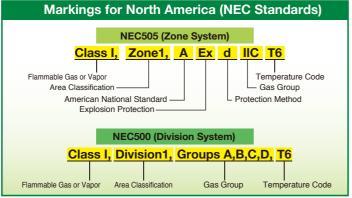

## Explosion-safe Protection

	Europe (ATEX Directive / (CENELEC) International (IEC)				North America Class I					
Protection Method	Protection	Zone	CENELEC	IEC		NEC505		NEC500		
r rotection metriou	Code	20116	ATEX	IECEx	Protection	Zone	US	Division	US	
Flameproof	Ex d	1, 2	EN60079-1	IEC60079-1	AEx d	1, 2	ANSI/ISA 60079-1	1, 2	FM3615 UL1203	
Increased Safety	Exe	1, 2	EN60079-7	IEC60079-7	AEx e	1, 2	ANSI/ISA 60079-7	_		
Intrinsic Safety (2 faults)	Ex ia	0, 1, 2	EN60079-11	IEC60079-11	AEx ia	0, 1, 2	ANSI/ISA 60079-11	1, 2	FM3610 UL913	
Intrinsic Safety (1 fault)	Ex ib	1, 2	EN60079-11	IEC60079-11	AEx ib	1, 2	ANSI/ISA 60079-11	-	_	
Purged/Pressurized	Ехр	1, 2	EN60079-2	IEC60079-2	AEx p	1, 2	ANSI/ISA 60079-2	1, 2	FM3620 NFPA496	
Encapsulation	Ex m	1, 2	EN60079-18	IEC60079-18	AEx e	1, 2	ANSI/ISA 60079-18		<u> </u>	
Non-incendiaries	_	_		_		_		2	FM3611 UL1604	
Type-n	Ex n	2	EN60079-15	IEC60079-15	AEx n	2	ANSI/ISA 60079-15			

## Zone Classification

	CENELEC	NEC505	Hazardous Area Classification
Gases	Zone 0	Class I Zone 0	An area where the mixture of explosive gas is continuously present or present for long periods.
Vapors	Zone 1	Class I Zone 1	An area where the mixture of explosive gas can be present during normal operation.
	Zone 2	Class I Zone 2	An area where the mixture of explosive gas is not normally present, but if it occurs, it will only be for brief periods of time.
	Zone 20		An area where the mixture of incendiary dust is continuously present or present for long periods.
Dust	Zone 21	_	An area where the mixture of incendiary dust can be present during normal operation.
	Zone 22		An area where the mixture of incendiary dust is not normally present, but if it occurs, it will only be for brief periods of time.

## **■** ATEX Directive (CENELEC)

Equipment Group	Category- Protection Level	Explosive Environment	Flammable Substances	Hazardous Areas
I -mines	M1- Very High Level	Constant Exposure	Methane	_
	M2- High Level	Ocassional Exposure	Coal Dust	_
	1- Very High Level	Constant Exposure	Gases	Zone 0 (Gases) Zone 20 (Dust)
II -other areas	2- High Level	Ocassional Exposure	Vapors Mists	Zone 1 (Gases) Zone 21 (Dust)
	3- Normal Level	Rare and Temporary	Dust	Zone 2 (Gases) Zone 22 (Dust)

## ■ ATEX/IEC Classification for Gases & Temperature Coding

	T1 (450°C)	T2 (300°C)	T3 (200°C)	T4 (135°C)	T5 (100°C)	T6 (85°C)
I	Methane	_	_			_
IIA	Acetone Ethane Propane	Ethyl Alcohol Cyclohexane n-butane	Gasoline Aircraft fuel Diesel fuel	Acetaldehyde	_	_
IIB	Lighting gas Acrylonitrile	Ethylene Ethylene oxide	Ethylene Glycol Hydrogen sulphide	Ethyl-ether	_	
IIC	Hydrogen	Acetylene				Carbon bisulfide

## Visual/Audible Signaling Products & LED Work Lights

A wide range of visual and audible signaling products, as well as super bright LED light bars, designed for use in hazardous locations that require the ATEX Directive 94/9/EC (CENELEC Standard). These unique and innovative models meet the criteria for Zone 2 (gas) and Zone 22 (dust) atmospheres.



LED Signal Towers								
Model Selection	Page	CENELEC Standard	Explosion Safety	Gas	Dust			
AR-070 Series	11	EN 60079-0, EN 60079-15, EN 60079-31	CE ( II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T85°C Dc IP65	Zone2	Zone22			
AR-078 Series	12	EN 60079-0, EN 60079-15, EN 60079-31	CE ( II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T85°C Dc IP65	Zone2	Zone22			
MP3 Field Programmable	Annunciato	or integrated with LED tower		Hazardo	us Area			


Model Selection	Page	CENELEC Standard Explosion Safety		Gas	Dust
LKEH-FV-EX Series	13	EN 60079-0, EN 60079-15, EN 60079-31	CE 😥 II 3GD Ex nA IIC T4 Gc, Ex tc IIIB T85°C Dc IP54	Zone2	Zone22
Melodies & Chimes Horns				Hazardo	us Area
Model Colection	Dogo	CENELEC Standard	Explosion Cofety	Goo	Duct

Super Bright LED Work Lights						
EHV-EX Series	15	EN 60079-0, EN 60079-15, EN 60079-31	CE 😡 II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T85°C Dc IP65	Zone2	Zone22	
EHS-EX Series	15	EN 60079-0, EN 60079-15, EN 60079-31	CE ⟨ II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T85°C Dc IP65	Zone2	Zone22	
LKEH-FE-EX Series	13	EN 60079-0, EN 60079-15, EN 60079-31	CE 🕟 II 3GD Ex nA IIC T4 Gc, Ex tc IIIB T85°C Dc IP54	Zone2	Zone22	
Widdel delection	i age	OLIVELEO Staridard	Explosion Salety	uas	Dust	

Super Bright LED Work Ligh	its			Hazardo	us Area
Model Selection	Page	CENELEC Standard	Explosion Safety	Gas	Dust
CLN-24-CD-PT-EX	15	EN 60079-0, EN 60079-15, EN 60079-31	CE 😥 II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T135°C Dc IP65	Zone2	Zone22
CLK-EX Series	16	EN 60079-0, EN 60079-15, EN 60079-31	CE 😥 II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T135°C Dc IP65	Zone2	Zone22
CLA-EX Series	16	EN 60079-0, EN 60079-15, EN 60079-31	CE 🔂 II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T135°C Dc IP65	Zone2	Zone22

<sup>\*</sup> These products are manufactured by PATLITE, converted and certified to explosion-safe by Artidor, and sold by PATLITE.

## Markings

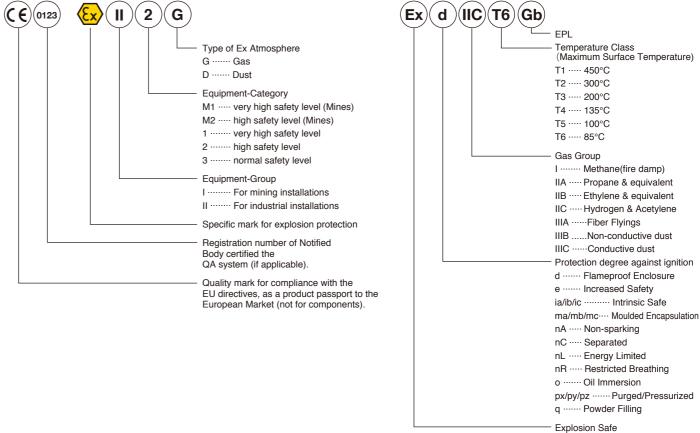

# **EDLM SERIES & EDWM SERIES EXPLOSION-SAFE**





Horizontal Mount

Vertical Mount

FM APPROVED

The EDLM (3 tiered LED) and EDWM (5 tiered LED) models are innovative LED maintenance-free Explosion-safe Signal Towers. Their robust design, along with pressure and flame-proof housing is ideal for use in potentially flammable and hazardous explosive environments, such as chemical, petrochemical, combustible dust, mineral/natural gas production; as well as for the food and beverage industries.

#### **■** Features

• Housing: Aluminum alloy

Descriptions

- Glass: Borosilicate glass
- Terminals: Easy wire connection to the Signal Tower by opening the bottom
- Mounting: Upright, Wall Mount, Vertical-mount, and Horizontal Mount
- LED color: Different color configurations are possible to custom-design
- Voltage: AC/DC24V, AC120V, AC230V, AC90-250V are available.
- Wire core size: 0.5mm<sup>2</sup>~0.8mm<sup>2</sup>, AWG20~AWG18

## ■ EDLM & EDWM are covered by the specifications shown in the shaded areas below

		Cla	ssification of hazardo	us areas	Patlite	Model EDLM , EDWM	1
Country	Area Classification	Constant Exposure	Occasiona Exposure	Rare and Temporary	Conformity hazardous areas	Explosive atmosphere	Certification authority
Europe	ATEX Directive 94/9/EC	Zone 0 Zone 20	Zone 1 Zone 21	Zone 2 Zone 22	Zone 1,2 Zone 21,22	Gas Dust	PTB (Germany)
North America	NEC Article505	Zone 0	Zone 1	Zone 2	Zone1, 2	Gas	FM (USA)
North America	NEC Article500	Divis	ion 1	Division 2	_	_	_

\*The ATEX directive is a CENELEC standard.

\*NEC is a National Electrical Code standard for North America.

## Specifications


		=======================================		ED14/14 500EE4	ED1404 5140EE4			
Туре	EDLM-302FEA	EDLM-312FEA	EDLM-323FEA	EDWM-502FEA	EDWM-5M2FEA			
Rated voltage	AC/DC 24V	AC 120V	AC 230V	AC/DC 24V	AC 90 ~ 250V			
Signal line current		Red/Amber: 52.5mA		Red: 22.6mA, Amber: 26	6.6mA, Green: 17.5mA			
(Per unit)		Green: 20.0mA		Blue/White	e: 38.9mA			
Operating temp.	ATEX Dire	ATEX Directive:-20 °C∼+50°C ( no ice) / FM Standard: -25°C∼+50°C ( no ice)						
Operating humidity		45% ~ 85RH (Keep from dew condensation )						
Ambient pressure		80Kpa ~ 110						
Lighting pattern		Flashing (60±12 flashes per minute) / Continuous light						
IP	IP66							
Vibration resistance	9.8m/s <sup>2</sup>							
Mounting type		Outdoor & Indoor Upright & Sideways						
1	Red: 350mcd or more, Amber: 580mcd or more Red/Green/White: 1000mcd							
Luminosity	Gre	en: 1300mcd or more		Amber: 700mcd or more, Blue: 300mcd or mo				
Mass(Main body)	4.3kg 4.7kg							
		Upper & Lower case : Aluminu	ım alloy					
	(Outside: Melamine baking finish)							
Material		Glass case : Borosili	cate glass					
		Fitting bracket : Stainles						
		Cable gland : Brass						
		•						


## **■** Explosion-Proof Structure and Functions


#### Indications

<ul><li>ATEX Directive</li></ul>	<ul><li>FM Standard</li></ul>				
<ul> <li>II 2G Ex dII C T6 (Zone1,2)</li> <li>II 2D Ex tD A21 IP66 T80 °C (Zone21,22)</li> </ul>	ClassI,Zone1,AExdIICT6 (Zone1)				
●EN60079-0 , EN60079-1 EN61241-0 , EN61241-1 ●ATEX compliant product, Recognized by: PTB	●FM3600 ANSI/ISA-12.00.01-2002 ANSI/ISA-12.22.01-2002 ●NEC505 compliant product, Recognized by: FM				
●This product is flameproof enclosure.  ●Can be used in the condition of GroupIIA,IIB,IIC under temperatue class T1~T6.					

# **(Ex)** Testing Authority PTB, NEC Article 505 Testing Authority FM

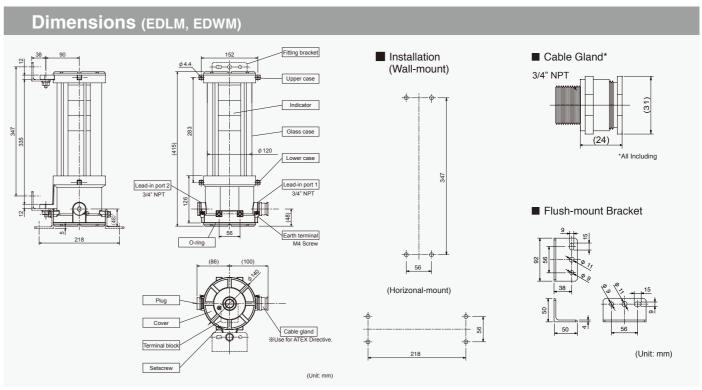

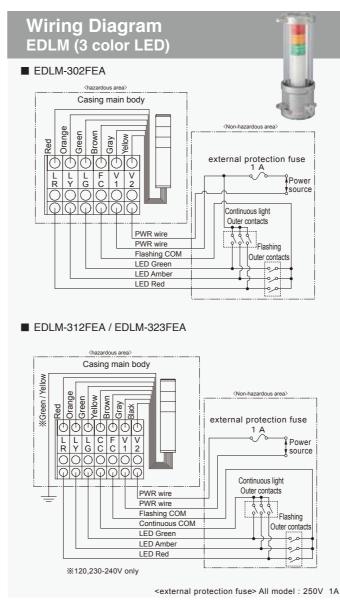

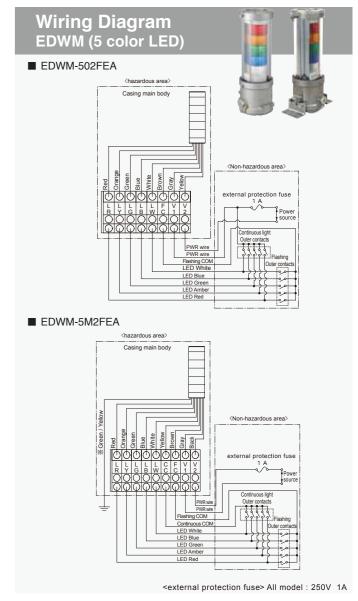

## AR-070 SERIES EXPLOSION-SAFE

CE 🕟 II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T85°C Dc IP65 94/9/Ex(ATEX)CENELEC:EN 60079-0, EN 60079-15, EN 60079-31

## Explosion-safe Signal Light Ø40mm

## Description

Explosion-safe Signal Light featuring an LED light that is versatile and energy-efficient. The vertical and horizontal cut lenses in combination with a double-reflection system enhances the LED light diffusion to create a unique, full and brilliant light. The lenses and main body are made of strong synthetic materials with characteristics to withstand harsh environments. The Signal Light can be ordered in any combination from 1 to 5 LED units with any color combination. In addition to its "continuous lighting" condition, the Signal Light can also be ordered with flashing / non-flashing functions, as well as with two super-loud alarm sounds with an 85dB (at 1m) output.

#### Features

- Explosion-safe for gas and dust
- Suitable for Zone 2 and Zone 22
- CE compliance in accordance to ATEX
- Full and brilliant lumination
- LED double reflection lighting system
- Different lens colors available
- 1 to 5 stack are available
- 1/2" NPT adapter for pole mount is available as an option
- Available with "flashing/non flashing" and two audible buzzer alarm sounds
- Ingress protection of IP65
- Wall-mount or 1/2" NPT mount



## Dimensions

 $\bigcirc$ 

SIGNAL LIGHT

SIDE MOUNT BRACKET


**TEMPLATE** 

1/2" NPT ADAPTER TYPE

## Specifications

Explosion-safety:	(€ ⟨ II 3 GD; Ex nA IIC T4 Gc: Ex tc IIIC T85 °C Dc IP65
CE conformities:	EN 60079-0, EN 60079-15, EN 60079-31
Certification:	EC-Declaration of conformity
Ambient Temperature:	-30 °C to +60 °C
Ingress Protection:	IP65 to EN 60529
Material:	ABS towerbody
Lighting Source:	Multiple LEDs with double reflection system
Acoustical Source:	Buzzer 85 dB (1m) with two different tones
Rated Voltage:	AC/DC 24V
Assembly position:	As desired
Activation Time:	100%
Module Colors Available:	Red, Amber, Green, Blue, Clear/white
Cable:	Factory sealed cable, Ø 8 mm, length 3 meter

	CURRENT	RATINGS	
LE	:D	BUZZ	ZER
Signal Lir	ne Current	Signal Line Current	Inrush Current
Red, Amber	Green, Blue, Clear	Signal Line Current	illiusii Cullelli
approx. 30 mA	approx. 25 mA	approx. 40 mA	approx. 250 mA

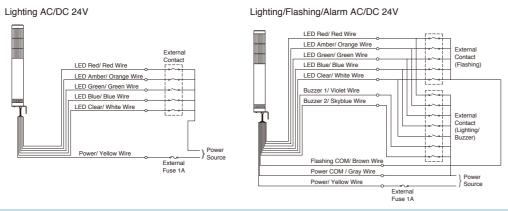

		EXPL	OSION	-SAFE SIGNAL	LIGHT			
How to order	Code	Voltage	Code	No. of Stacks	Code	Bracket	Colors*	Code
Continuous lighting (only)	1	AC/DC	1	1-5	1 2 3	Blank:L Type	Red Amber Green	R Y G
Continuous/Flashing lighting and two Audible alarms	2	24V	'	1-5	3 4 5	N:NPT Type	Blue Clear/White	B C
How to Order AR-070- 0 1 / - RYGBC *From top to bottom  ** AC type is available by special order.								

## AR-078 SERIES EXPLOSION-SAFE

CE 🕟 II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T85°C Dc IP65 94/9/Ex(ATEX)CENELEC:EN 60079-0, EN 60079-15, EN 60079-31

## Explosion-safe Signal Light Ø60mm

### Description

Explosion-safe Signal Light featuring an LED light that is versatile and energy-efficient. The vertical and horizontal cut lenses in combination with a double-reflection system enhances the LED light diffusion to create a unique, full and brilliant light. The lenses and main body are made of strong synthetic materials with characteristics to withstand harsh environments. The Signal Light can be ordered in any combination from 1 to 5 LED units with any color combination. In addition to its "continuous lighting" condition, the Signal Light can also be ordered with flashing / non-flashing functions, as well as with two super-loud alarm sounds with an 90dB (at 1m) output.

#### Features

- Explosion-safe for gas and dust
- Suitable for Zone 2 and Zone 22
- CE compliance in accordance to ATEX
- Full and brilliant lumination • LED double reflection lighting system
- Different lens colors available

SIGNAL LIGHT

SIDE MOUNT BRACKET

TEMPI ATE

3/4" NPT ADAPTER TYPE

- 1 to 5 stack are available
- 3/4" NPT adapter for pole mount is available as an option
- Available with "flashing/non flashing" and two audible buzzer alarm sounds
- Ingress protection of IP65
- Wall mount or 3/4" NPT mount




## Dimensions

## Specifications

Explosion-safety:	( € ⟨
CE conformities:	EN 60079-0, EN 60079-15, EN 61241-0, EN 61241-1
Certification:	EC-Declaration of conformity
Ambient Temperature:	-30 °C to +60 °C
Ingress Protection:	IP65 to EN 60529
Material:	ABS towerbody, polyester glassfibre reinforced base
Lighting Source:	Multiple LEDs with double reflection system
Acoustical Source:	Buzzer 90 dB (1m) with two different tones
Rated Voltage:	AC/DC 24V
Assembly position:	As desired
Activation Time:	100%
Module Colors Available:	Red, Amber, Green, Blue, Clear/white
Cable:	Factory sealed cable, Ø 8 mm, length 3 meter

CURRENT RATINGS  LED BUZZER					
		CURRENT	RATINGS		
0'	LE	:D	BUZZ	ZER	
Signal Line Current	Signal Lir	ne Current	Circuit Line Comment	lawah Owwant	
Red, Amber Green, Blue, Clear Signal Line Current Inrush Current	Red, Amber	Green, Blue, Clear	Signal Line Current	inrush Current	
approx. 30 mA approx. 25 mA approx. 40 mA approx. 250 mA	approx. 30 mA approx. 25 mA		approx. 40 mA	approx. 250 mA	

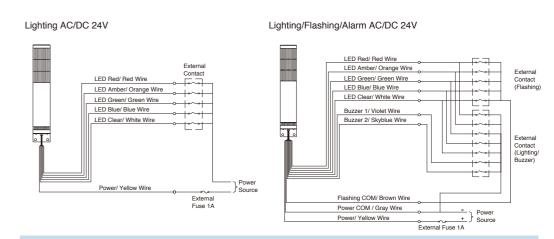

		EXPL	OSION	-SAFE SIGNAL	LIGHT			
How to order	Code	Voltage	Code	No. of Stacks	Code	Bracket	Colors*	Code
Continuous lighting (only)	1	AC/DC	1	1-5	1 2 3	Blank:L Type	Red Amber Green	R Y G
Continuous/Flashing lighting and two Audible alarms	2	24V		1-5	4 5	N:NPT Type	Blue Clear/White	B C
How to Order AR-078- 0 1 / - RYGBC *From top to bottom								

※ AC type is available by special order

## LKEH-FE-EX, LKEH-FV-EX EXPLOSION-SAFE


CE 🕟 II 3GD Ex nA IIC T4 Gc, Ex tc IIIB T85°C Dc IP54 94/9/Ex(ATEX)CENELEC:EN 60079-0, EN 60079-15, EN 60079-31


## 105dB(A) MP3 Field Programmable Annunciator, Melody Horn

- Explosion-safe for gas and dust
- Suitable for Zone 2 and Zone 22
- CE compliance in accordance to ATEX
- Super bright LED colors correspond to different voice, sounds, chimes and melodies.
- Voice alert messages of up to 63 seconds (64kbit/s) with 5 channels can be played back.
- 32 combinations of sounds, chimes and melodies are pre-recorded.
- 8 sounds can be played back by a bit input, and 32 sounds by binary input.
- Volume is adjustable from 0 to 105dB at 1 meter.
- Field programmable with MP3 by SD card for the model LKEH-FV-EX.
- Well visible with the super bright 100mm diameter LED from far distance.
- Robust design to withstand against 2G vibration.
- The body is made of Acrylonitrite-Ethylene-Styrene for weather resistance.
- Easy to control by only one common wire for both LED units and
- NPN is standard. PNP open collector type is also available on order.



#### Dimensions



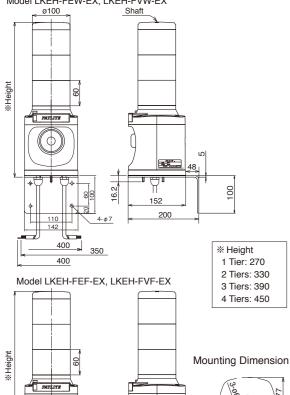


#### ■ Sound Selection Charts

- Pre-recorded on model LKEH-FE-EX.
- 8 sounds can be played back by a bit input, and 32 sounds by binary input.

Веер	Stutter + Bell	Inverted Revelle	Annie Laurie
Stutter	Synthesized Melody	Galactic Motor	London Bridge
Bell	Chime	Ringing Phone	Mary`s Lamb
Yelp	Call Sign	Two Tone	Camptown Races
Rapid Hi Lo	Train Ride	Alarm Clock	Amaryllis
Melody Chime	Galloping Hi Lo	Ringing Hi Lo	Symphony #40
Synthesized Piano	Alien Chatter	Fur Elise	Ave Maria
Synthesized Bell	Falling Crystals	Minuet	Grandfather's Clock

Model	MP3	Power	SD card(SD-2GP) for - • the model	
LKEH-FEF-EX/LKEH-FEW-EX		14.2W	LKEH-FVF-EX and	
LKEH-FVF-EX/LKEH-FVW-EX	Supports	14.2W	LKEH-FVW-EX sold separately.	

#### How to Order

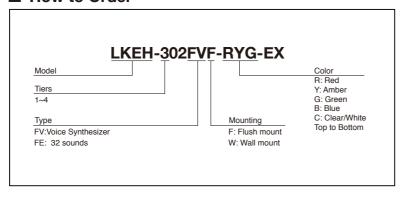

#### Specifications

Model	Rated Voltage	Voltage Range	MP3, Melody	Operating Temperature Range	Recordable Duration	Sound Pressure (at 1m)	Messages	Mass
LKEH-FEF-EX			Type-E		Prerecorded		8ch bit input, 32ch binary input	2.8Kg
LKEH-FEW-EX	DC 24V	24VDC±10%	Type-E	-10°C to +50°C,	Prerecorded	105dB	8ch bit input, 32ch binary input	3.2Kg
LKEH-FVF-EX	DC 24V	24VDG±10%	MPEG1-Audio layer III, 64kbit/s	Humidity 85% or less	63 sec.	10305	5ch bit input, 31ch binary input	2.8Kg
LKEH-FVW-EX			MPEG1-Audio layer III, 64kbit/s		63 sec.		5ch bit input, 31ch binary input	3.2Kg

The mass indicated is based on a 3 tiered LED Model LKEH. The mass will change in conjunction with the number of tiers. Add or remove 0.2 Kg per module.

## EHS-EX, EHV-EX EXPLOSION-SAFE


CE 🕟 II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T85°C Dc IP65 94/9/EC(ATEX)CENELEC:EN 60079-0, EN 60079-15, EN 60079-31


## 105dB (at 1m) Melodies & Chimes Horn

- Protection Rating of IP65.
- · Explosion-Safe for gas and dust
- Suitable for Zone 2 and Zone 22
- CE Compliance in accordance to ATEX
- EHS-EX comes with 32 preloaded melody and alarm sounds with adjustable volume up to 110dB (@ 1m).
- Robust, indoor and outdoor use with vibration resistance up to 4.5G.
- EHV-EX comes with 63 preloaded crisp and clear melody and alarm sounds with adjustable volume up to 110dB (@ 1m).
- EHV-EX offers a field-programmable MP3 function with a maximum of 220 sec. of recording time (@ 64kbps) and an adjustable volume up to 105dB (@ 1m).
- Ideal for plant-wide notification, public address and process control.
- UL464, CSA-C22.2 NO.205-M1983, FCC Part 15 Subpart B Class 4.
- CE, RoHS Compliant (EHS-M1 and EHV-M1 Only).




#### Dimensions






# Terminal (NPN)


■ Wiring Diagram Non-voltage (NPN) Wiring








Terminal (PNP)



14

## ■ How to Order



## Specifications

Model	Rated Voltage	Voltage Range	Power Consumption	Rated Current Consumption		Operating Temperature Range	No. of Playback Messages	Protection Rating	Wiring Type	Mass
EHS- M1H	DC 12 - 24V	DC 10.8V	4W (at DC24V)	450mA (max)	Alarm: 110dB (at 1m)	-20 °C to +50 °C	Bit Input: 8	IP65	Cable	1.25kg
EHS- M1T		to 26.4V	(at DOZ4V)	, ,	, , ,	(Less than 85% RH)	Binary Input: 32		Terminal	
EHV- M1H		DC 10.8V	4W	400mA (may)	Alarm: 110dB (at 1m)	-20 °C to +50 °C	Bit Input: 8	IP65	Cable	1.25ka
EHV- M1T	to 26.4V	(at DC24V)	400mA (max)	MP3: 105dB (at 1m)	(Less than 85% RH)	Binary Input: 63	11-05	Terminal	1.25Kg	

Note 1: The sound pressure level is based on measurements under controlled conditions (voice-synthesized 1 kHz sine wave played back from a distance of 1 meter), therefore the surrounding environmental conditions and message content will result in different values for the sound pressure level.

Note 2: Even when starting two or more units simultaneously, a lag will occur during message playback. MPEG Layer-3 audio coding technology licensed from Fraunhofer IIS and Thompson Licensing. (Model EHV)

13

## CLN-24-CD-PT-EX EXPLOSION-SAFE


CE (x) II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T135°C Dc IP65 94/9/Ex(ATEX)CENELEC:EN 60079-0, EN 60079-15, EN 60079-31

## Water/Oil Resistant LED Work Light

- 820 lx brightness, equivalent to a 40 watt incandescent bulb
- 60,000 hrs., or about 7 years of long service life (\*1)
- IP66G, IP67G, IP69K protection (\*2)
- DC24V (Polarized)
- IEC62471 Compliance (Photobiological Safety Standard)
- Daylight Color Temperature (6,500K) suitable for very detailed work
- Comes with a flexible stainless-steel angle bracket for versatile installation (\*3)
- Wide operating ambient temperature range (-40°C to +60°C)
- Low current draw of 174mA
- Very compact, light-weight and durable design
- (Thickness) 22.2mm X (Width) 85mm X (Height) 128mm



#### ■ Light Distribution Characteristics



High power LED with 820 lx provides sufficient illumination with only a 174mA current draw.



Stainless steel flexible angle bracket allows a versatile installation, instantly enabling direct illumination to the work area






The pan/tilt brackets can also be removed for Rear Attachment applications.

Natural light distribution when illuminating a

Color temperature of 6,500K is suitable for detailed and fine work, while providing photobiological safety.








## Specifications


p	
Model	CLN-24-CD-PT-EX
Color Code (Color)	CD (Daylight)
Color Temperature (typ.)	6500K
Illumination (typ.) (Centered at 24VDC) 1m	820 lx
Total Luminous Flux (typ.)	550 lm
Rated Voltage	DC 24V (Polarized)
Operating Voltage Range	DC 24V ±10%
Rated Current/Power Consumption	174mA ±10% / 4.2W
Operating Ambient Temperature	-40°C to +60°C (90% RH, No Condensation)
Main Unit Material	Body: Aluminum Alloy, Lens: Tempered Glass
Protection Rating	IP66G/67G (JIS C 0920)/69K (DIN 40050 part 9) (excluding cable end)
Mounting Location/Direction	Indoor / Any Direction
Insulation Resistance	DC 500V 5MΩ or more
Withstand Voltage	500VAC for 1 minute (Between terminals and chassis)
Vibration Resistance	30Hz total amplitude 0.3mm <sup>PP</sup> Back and forth, up and down, right and left for 2 hours each Total amplitude 0.3mm <sup>PP</sup> (10-57Hz), Acceleration 19.6m/s <sup>2</sup>
Mass (Tolerance ±10%)	430g

- \*1: The typical value of LED brightness is 70% of the original specification, but may vary depending on actual applications.
  \*2: IP66G and IP67G are Japanese Industrial Standards (JIS C0920-2003), and IP69K is the German DIN 40050 PART9 Standard.
  \*3: CLN-24-CD-PT-EX Work Light can only be installed where risk of mechanical danger is limited to 2 Joules of impact energy

## Dimensions



## -24 -- EX EXPLOSION-SAFE

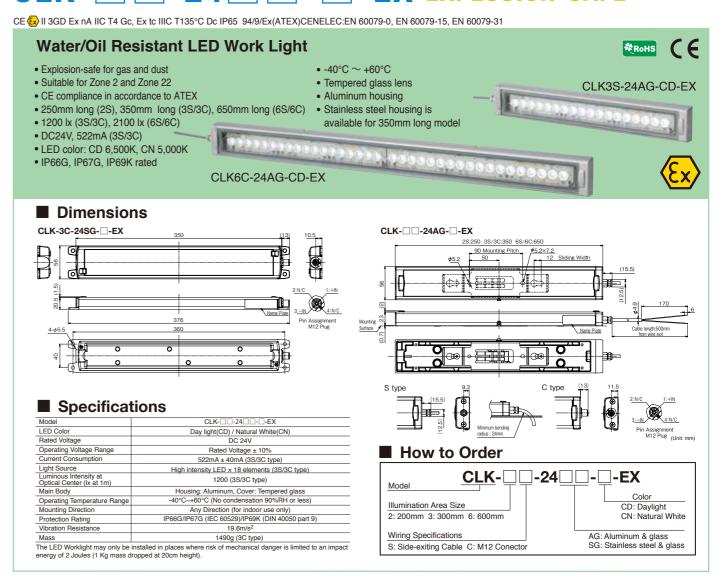

## **CLA SERIES EXPLOSION-SAFE**

CE € II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T135°C Dc IP65 94/9/Ex(ATEX)CENELEC:EN 60079-0, EN 60079-15, EN 60079-31

- Explosion-safe for gas and dust
- Suitable for Zone 2 and Zone 22
- CE compliance in accordance to ATEX
- 100mm(140 lx), 200mm(270 lx), 300mm(400 lx), 600mm(650 lx) 900mm(810lx), 1200mm(890lx), 1500mm(945lx)
- DC24V (polarized)
- Cable Length: 3m

- IP66 IP67 and IP69K rated
- -40°C ~ +60°C
- · Polycarbonate Mounting brackets available





3-φ4.2 (Beveled) /

**CLA** □ S-24- □ □-30-EX LED color CD Daylight 6800K CN Natural white 4800K Length 1 100mm 6 600mm 15 1.500mm

3 300mm 12 1,200mm

2 200mm 9 900mm

Rear Attachment (Magnetic Mount) Model SZ-310ARM \*Stainless steel brackets are also available

Options

Side Attachment Side Attachment Model SZ-310ASB (Screw Mount) Model SZ-310AS

\*RoHS ( ECSLAB

Specifications

Rated Current Consumption Center Radiation (lx/50cm) Length Mass CLA1S-24-CD-30-E CLA1S-24-CN-30-E CLA2S-24-CD-30-E CLA2S-24-CN-30-E Daylight
Natural White
Daylight
Natural White
Daylight
Natural White 100mm 140 80 g 104mA 130 g 200mm 208mA 270 240mA 400 180 g 300mm Daylight
Natural White
Daylight
Natural White
Daylight
Natural White
Natural White DC 24V (Polarized) CLA6S-24-CD-30-EX 480mA 650 19.6m/s<sup>2</sup> 340 g 600mm DC24V+10% CLA6S-24-CN-30-EX CLA9S-24-CD-30-EX 720mA 500 g 810 900mm 660 g 1,200mm 960mA 890 1,200mA 1.500mm 945 820 g

## LFH-EX EXPLOSION-SAFE


CE 🕟 II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T85°C Dc IP66 94/9/EC(ATEX)CENELEC:EN 60079-0, EN 60079-15, EN 60079-31


## **Indoor/Outdoor LED Warning Light**


- Explosion-safe for gas and dust
- Suitable for Zone 2 and Zone 22
- Dome colors: Red, Yellow, Blue
- Triple flash, 110 +/-10 flash/minute
- Indoor/Outdoor use allows for the unit to be used in various environments such as factories, utilities, food and beverage, pharmaceutical, parking lots, and others.
- Vibration resistance of 90m/s² (9G)\* can withstand the mounting on to forklifts, construction, maintenance, and other industrial vehicles.
- 1/2" NPT adaptor
- IP66 (IEC60529)
- NEMA Type 4, 4X, 13
- RoHS Directive (EN50581)
- CE
- FCC Part 15 Subpart B Class A



## **■** Dimensions

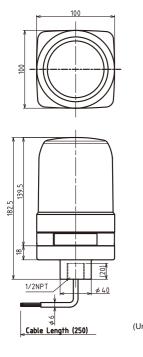

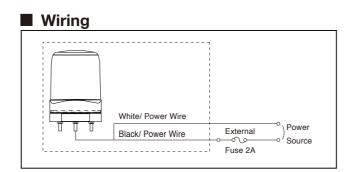



#### **■** Specifications

Model	LFH-24	LFH-M2	
Rated Voltage	DC 24V	AC 100V/120V/200V/230V	
Operating Voltage Range	DC 20V~30V	AC 100V~240V	
Operating Ambient Temperature	-22°F ~ +158°F (-30°C ~ +70°C)	-4°F ~ +140°F (-20°C ~ +60°C)	
Operating Ambient Humidity	Less than 90% (No condensation)		
Mounting Location	Indoors and Outdoors		
Mounting Direction	Upright, Inverted, and Sideways (In a wet environment)		
Vibration Resistance	90 m/s <sup>2</sup> 20 m/s <sup>2</sup>		
Protection Rating	IP66 (IEC 606529)		
Luminous Intensity	Red: more than 112cd Yellow: more than 177c	d Blue: more than 52cd	
Weight (+/- 10%)	20.1oz (570g) 21.5oz (610g)		

#### \*Vibration resistance 20m/s² for the LFH-M2

## **RES-A** Heavy Duty Revolving Warning Light for Harsh Environment


## **Robust Heavy Duty Revolving Warning Light**

- φ224mm diameter.
- Integral Rotating Parabolic Reflector: For enhanced visibility from a distance.
- Installation: Indoors—upright, inverted, sideways; Outdoors—upright only.
- Main Body: Aluminum alloy die-cast with silver color baked finish.
- Dome: Acrylic resin covered with clear hard-glass, and metal guard.
- Available Colors: Red, Amber, Green and Blue.
- IP66
- The metal cable gland is an optional part. Needs special order.




The metal cable gland is only available as an option. Please order it separately.

## **■** Dimensions



## Mounting Dimension



TIIS is a non-governmental, non-profit and self-sustaining organization founded in Japan in 1965 and recognized by the Minister of Health, Labor and Welfare as a juridical incorporation, to help reduce industrial accidents and contribute towards the benefits of industrial sectors in Japan through its various technological activities.

## ■ RES-A Type

Model	Rated Voltage	Current	Rotations per	Bulb	Rulh	
	Table Tellings		Minute		Repl No.	Mass
© RES-12A	DC 12V	0.9A	170	12V10W	9	
© RES-24A	DC 24V	0.5A	170	24V10W	10	
© RES-48A	DC 48V	0.3A	150	48V10W	11	
RES-100A	AC 100~110V	0.1A				6.5kg
© RES-120A	AC 115~120V	U.1A	170	12V5W	12	
RES-220A	AC 200~220V	0.05A	170	120300	12	
© RES-240A	AC 230~240V	0.05A				

Bulb---G18 BA15S ©: Special Order



7